Accessories for Wireless RFSYSTEMlab Intraoral Cameras

Macro Lens Cap - USB Capture - Disposable Camera Covers

Buy Now

Macro Lens Cap - for IntraOral Cameras

50x Magnification

Autoclavable

The 50x magnification shows you things that cannot normally be seen with any ordinary 3.5x microsurgical eyeglasses!

Made in Japan By - RF SYSTEMlab

Amazing Crystal Clear Images

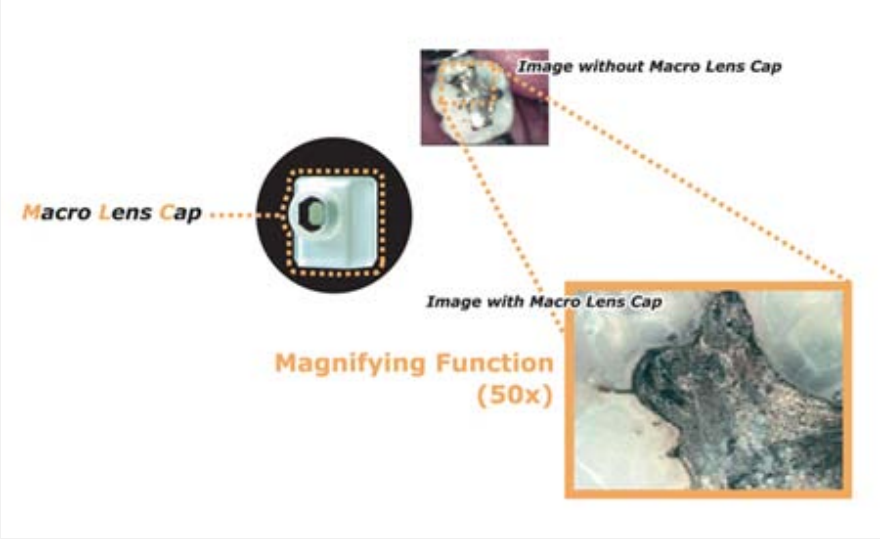

USB 2.0 video grabber for IntraOral Cameras

USB-Capture 110

USB-Capture 110 is an external USB 2.0 video grabber. Through USB 1.2/2.0, you could transfer video images from your IntraOral Camera or other video related devices to your PC without any distortion.
It provides full video resolution (720*480 30fps for NTSC, or 720*576 25fps for PAL) recordings.

With the extra software utilities, you could edit your video and images, make MPEG1/MPEG2/MPEG4 movies and even create VCD/DVD titles.

** This is the smallest, yet the most effective external USB capture device**

***Features**

- Full-Screen Video Resolution Input:
  With USB 2.0, it offers a full-screen video resolution up to 720*480 30 fps for NTSC and 720*576 25 fps for PAL. With USB 1.1, the video resolution reaches up to 320*240 30 fps for NTSC and 320*288 25fps video for PAL.
- WDM Compatible:
  It conforms to WDM standard and works with all AP software compatible with this standard.
- USB 1.1 and 2.0 Supported:
  With the USB interface, you are able to hot-swap the device. USB 2.0 with the bits rate up to 480Mbps will even bring your video resolution up to the DVD quality.
- Multi-Input Connections:
  It offers an S-Video input and a Composite Video input. More than just watching the video, you could record the full motion video or still frame image from different devices such as the DV Camcorder, VCR or DVD player.
- No Power Adaptor Required:
  You don't need to get an extra power outlet for the device. It will simply consume the bus power from USB instead of the power adaptor.

***Specification**

Interface	USB 2.0
Video Input	Composite Video RCA Jack
	S-Video Mini-Din Jack
Video Output	USB 2.0 connector
LED Indicator	AP On/Off
Power Requirement	USB Bus Power
Dimension	80mm(L)*30mm(W)*15mm(H)
Weight	34 g

***Package contents**

- USB Capture 110 unit.
- Audio cable.
- Utility CD

Available downloads

- USB Capture 110 User Manual - Download here!
- USB Capture 110 Updated driver - Download here!
- USB Capture 110 driver patch for SP2 - Download here!

Disposable Covers - for IntraOral Cameras

Pack of 500 x Disposable sleeves / Covers

For all Intraoral cameras / Satellite scopes
by RFSYSTEMlab & similar model camera

Macro Lens Cap - USB Capture - Disposable Camera Covers

Buy Now

Back

© TemplateSpace.com & DentAll