

Full HD video communications—
Now more accessible than ever



Feature-Rich, Full HD Video Is Here

LifeSize[®] Express 220[™] is Full HD video communications system that is both affordable and scalable. Ideal for small working groups, teams or individual knowledge workers who want to take communication over distance to the next level, LifeSize Express 220 has it all.

With LifeSize Express 220, you not only get Full HD video quality—1080p30/720p60—for natural, realistic interactions at the lowest possible bandwidth, but also crisp, crystal clear data sharing and an all new digital I/O with Full HD support, plus dual HD displays, Full HD camera, and phone or microphone options.

Express 220 brings people together by allowing them to interact successfully across distances. Seeing facial expressions, body language and gestures makes you feel truly connected and understood.

And just like all of the products in the LifeSize 220 Series, LifeSize Express 220 features:

- Highest available resolution on the market—1080p30
- Unprecedented bandwidth/performance
- Adaptive Motion Control with Forward Error Correction
- Streaming and recording of point-to-point calls

HD quality. Simplicity. Meaningful team connections. LifeSize Express 220 is clearly how video communications are meant to be.

LifeSize Express 220 Key Features

Video
Quality

Full HD
Standards-based
1920x1080 - 30fps
1280x720 - 60fps

Multiple HD
Monitors



HD Camera



HD Audio



External
Audio & Video
Input/Output

Audio: 5 in, 4 out
Video: 2 in, 2 out

Point-to-Point
HD Video
Communications



Product Specifications

LifeSize® Express 220™

System Components

LifeSize codec
HD PTZ LifeSize Camera 200 or
LifeSize Camera 10x
LifeSize MicPod or LifeSize Phone
Wireless remote control
Power supply/cables

Communications

H.323, SIP, 128 Kbps–4.0 Mbps
1xRJ-45 Network LAN
1x3.5 mm Mic In for LifeSize MicPod
1 x RJ-45 for LifeSize Phone or LifeSize Networker
(optional)

Support for Multiple Displays

Any HD displays supporting HDMI or DVI-I input
For additional information on displays, visit:
www.lifesize.com/support

HD 1080p30/720p60 PTZ Camera

Wide-angle zoom lens with 70 degree field of view
Up to 4x/10x optical zoom on LifeSize Camera 200/10x
Auto focus/Automatic gain control
10 camera presets (near or far end)
Standard 3.0 M HDMI cable

Video Specifications/Video Resolutions

Maximum resolutions widescreen 16:9 aspect ratio
All resolutions progressive scanning
All resolutions at 30 frames per second except 60
frames per second where noted
384 Kbps (912x512 pixels) DVD resolution
512 Kbps (1024x576 pixels)
768 Kbps (1280x720 pixels) high definition
1.1 Mbps (1280x720 pixels @ p60) high definition
1.7 Mbps or higher (1920x1080pixels) high definition

Video Standards

H.261, H.263, H.263+, H.264 and H.239 and BFCP
compliant with Polycom
Support for multiple dual live streaming modes:
1080p30 and 720p5; 720p60 and 720p5; 720p30 and
720p30

Video Inputs (2 Inputs)

1 x HD Video In (1080p30/720p60)
1 x DVI-I In (HDMI/VGA enabled)

Video Outputs (2 Outputs)

2 x HD Digital video out (1080p30/720p60)

HD Audio

Single omni-directional LifeSize MicPod
100Hz up to 16 kHz
Mute button (Micpod only)
Powered by codec directly through cable

Audio Features

GIPS NetEQ packet loss concealment
Full duplex for natural conversations
Echo cancellation for echo-free calls
Automatic gain control
Automatic noise reduction
Three-way audio add-on call capability
MicPod or Dual MicPod support (optional)

Audio Standards

G.711, G.722, G.722.1 and G.722.1C licensed from
Polycom®, G.728, G.729, MPEG-4-AAC-LC

Audio Inputs (5 Inputs)

1 x Line In (L+R) (3.5mm)
1 x Mic In - two channel (3.5mm)
1 x RJ-45 (LifeSize Phone) (optional)
1 x HD Video In
1 x DVI-I In

Audio Outputs (4 Outputs)

1 x Line Out/Headset (L+R)
1 x RJ-45 (LifeSize Phone) (optional)
2 x HD Video Out

Other Supported Standards

H.221, H.224, H.225, H.231, H.241, H.242, H.245, H.281,
BONDING (ISO13871) via LifeSize Networker, RFC 3261,
RFC 3264, RFC 2190, RFC 3407, RFC 2833

User Interface & Features

Context-sensitive user interface
Graphical user interface call manager
Multiple languages supported
Do Not Disturb mode
RS-232 serial pass-through support

Stream/Record with LifeSize® Video Center

Record/stream outside of a call
Record/stream point-to-point or multipoint calls
Capture all, near or far call participants
Auto-record all calls
Single button, ad-hoc recording
Recording indicator

Security

Admin and user-level password
SNMP security alerts
Ability to disable HTTP, SSH and Telnet services
H.235 (AES) encryption support including strict
compliance
TLS/SRTP support
IEEE 802.1x support
Kensington Security Slot

Intelligent Networking Features

Adaptive Motion Control (AMC) including Forward Error
Correction (FEC)
NAT/firewall traversal (H.460/SIP)
IPv4 and IPv6 support
Auto bandwidth detection
ISDN support via LifeSize Networker

Directory and Address Book

Up to 1000 local directory entries
Save, lock, remove, redial list features
Missed call notification
Auto-Discovery directory lookup (patent pending)
LDAP support/H.350 compliant
Meetings directory support
H.323 URI dialing support (Annex O)

System Management

Out-of-box setup via web interface and
management tool
SNMP
Backup and restore capability
JPEG snapshots through web interface

Power

AC voltage 100–240V, 50–60 Hz, 2.5A via external
power supply

Environmental Data

Operating temperature: 0° C (32° F) to 40° C (104° F)
Operating humidity: 15% to 85%, non-condensing
Storage temperature: -20° C (-4° F) to 60° C (140° F)
Storage humidity: 10% to 90%, non-condensing


Codec Dimensions

Width: 288 mm (11.34")
Depth: 187.5 mm (7.38")
Height: 41.3 mm (1.63")
Weight: 1.29 Kg (2.84 lbs)

Regulatory Model Number
LifeSize Express 220 = LFZ-018



Microsoft® qualified with
Microsoft® Office Communications Server 2007 R2™ and
interoperable with Microsoft Lync

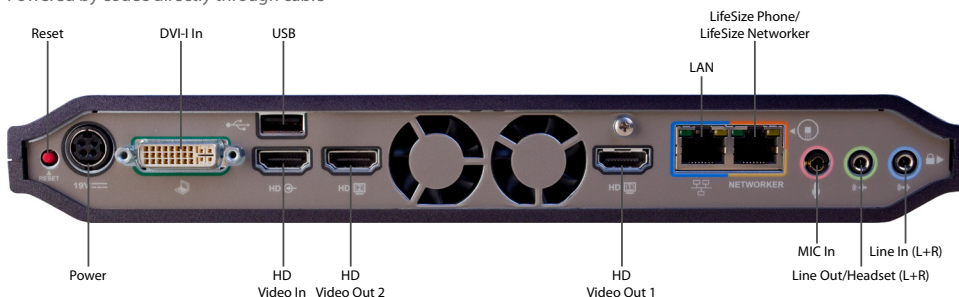

AMERICAS:

LifeSize
1601 S. MoPac Expressway
Suite 100
Austin, Texas 78746 USA

+1 512 347 9300
Toll Free US +1 877 543 3749
E-mail info@lifesize.com
www.lifesize.com

EMEA:

LifeSize Regional Office
+49 89 1222 899 0 (Germany)
Toll Free Europe 00 8000 999 09 799

APAC:

LifeSize Regional Office
+65 6303 8370 (Singapore)